




RIDGERS

2, 4 & 6 DISC RIDGERS



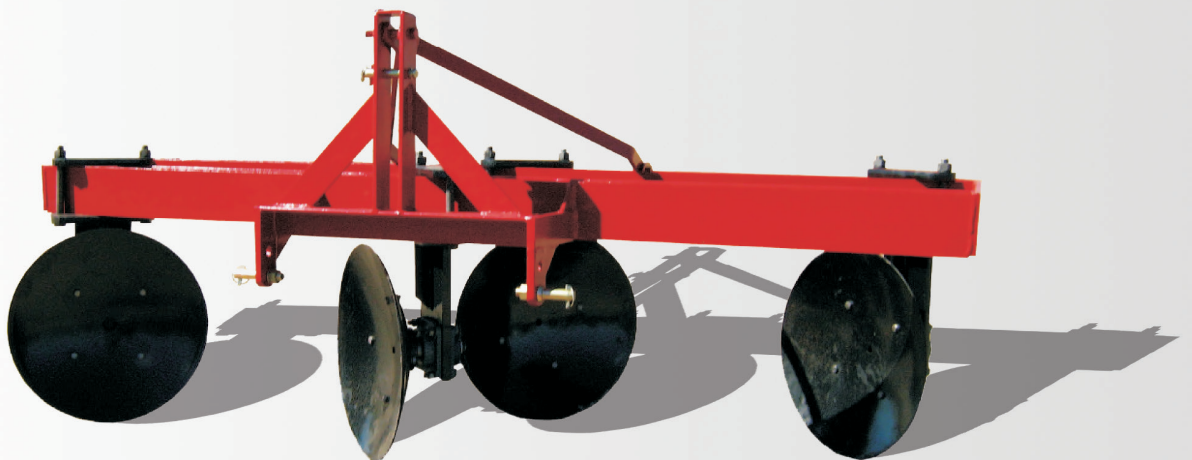

RIDGERS

2, 4 & 6 DISC RIDGERS

TECHNICAL SPECIFICATIONS

This primary soil tillage machine is mounted on the tractor's hydraulic lifting unit and universal three-point linkage system, therefore transportation to the field can be done easily. These disc ridgers are used for making one, two or three ridges or seedbeds, and opening canals. Depending on the user's requirements, disc angles can be adjusted up to 45°. This machine is mainly used by vegetable farmers. By means of the adjustable hangers on the machine, the row spacing of canals and ridges can be adjusted from 300mm to 1500mm. This machine is manufactured from a 150mm x 150mm H-beam toolbar. The bearings are heavy-duty flange-type bearings mounted on a 32mm hanger with a heavy duty shaft and flange, accommodating either a 610mm or 660mm disc (scalloped or plain).

| STOCK CODE | SPECIFICATIONS | NUMBER OF DISCS | NUMBER OF ROWS | TOTAL WIDTH | TOTAL LENGTH |
|------------|----------------|-----------------|----------------|-------------|--------------|
| AWB 24/1 | SINGLE ROW | 2 | 1 ROW | 1 800mm | 500mm |
| AWB 24/2 | DOUBLE ROW | 4 | 2 ROWS | 3 050mm | 1 100mm |
| AWB 24/3 | TRIPLE ROW | 6 | 3 ROWS | 4 050mm | 1 100mm |

| TOTAL HEIGHT | WORKING DEPTH | WORKING WIDTH | SPACE BETWEEN RIDGES | DISC DIAMETER | REQUIRED POWER |
|--------------|---------------|---------------|----------------------|---------------|----------------|
| 1 250mm | 250mm | 300-1 500mm | ADJUSTABLE | 610/660mm | 35-40kW |
| 1 250mm | 250mm | 300-2 800mm | ADJUSTABLE | 610/660mm | 50-55kW |
| 1 250mm | 250mm | 300-3 800mm | ADJUSTABLE | 610/660mm | 60-65kW |

* Manufacturer reserves the rights to change the above without any notice.