




CULTIVATORS

S-TINE TILLER SERIES



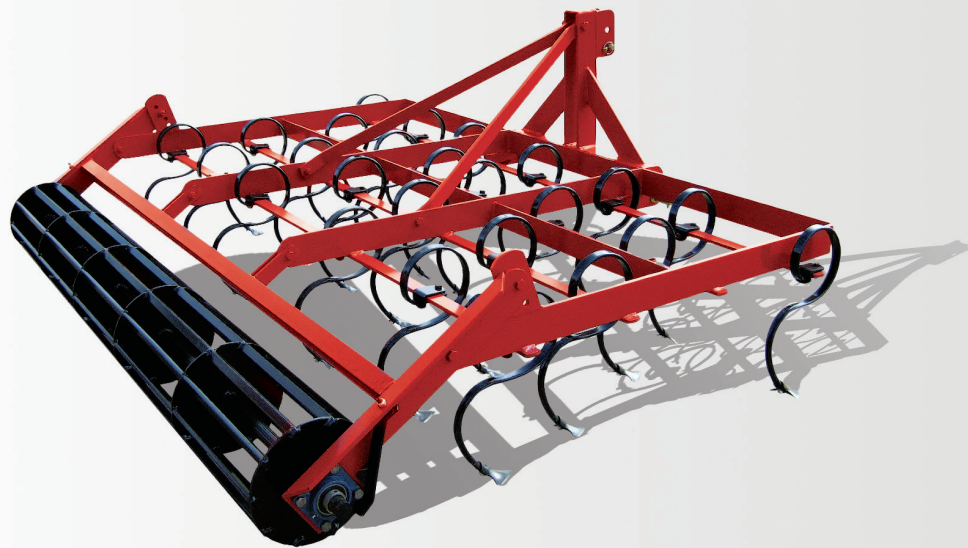

CULTIVATORS

S-TINE TILLER SERIES

TECHNICAL SPECIFICATIONS

This secondary soil tillage machine is mounted on the tractor's hydraulic lifting unit and universal three-point linkage system, therefore transportation to the field can be done easily. These tillers are secondary soil tillage machines that has been developed for light cultivation, weed control and seedbed preparation and at the same time aerates and loosens the upper layer of the soil. The optimum working depth is between 50mm to 100mm at a speed of 8 to 12 kilometers per hour. The 2.0m, 2.5 m, 3.0m, 3.4m and 4m tillers come standard with a roller/crumbler and for the 6.0m and 8.0m hydraulically folding tiller. The roller/crumbler is an optional extra. The roller/crumbler will leave a clod-free seedbed. The tines are manufactured from 300mm x 10mm high tensile spring steel. Each tine is fitted with a 100mm single-hole sweep. This sweep can be replaced with a chisel point.

STOCK CODE	NUMBER OF TINES	TOTAL WIDTH	WORKING DEPTH	DEPTH CONTROL WHEELS	WORKING WIDTH	SPACE BETWEEN TINES	SWEEP SIZE	REQUIRED POWER	ROLLER / CRUMBLER
ASVT 2000	20	2 000mm	50-100mm	NO	2 000mm	100mm	100mm	35-40kW	YES
ASVT 2500	25	2 500mm	50-100mm	NO	2 500mm	100mm	100mm	45-50kW	YES
ASVT 3000	31	3 000mm	50-100mm	NO	3 000mm	100mm	100mm	55-60kW	YES
ASVT 3400	34	3 400mm	50-100mm	OPTIONAL	3 400mm	100mm	100mm	65-70kW	YES
ASVT 4000	41	4 000mm	50-100mm	OPTIONAL	4 000mm	100mm	100mm	70-75kW	YES

* Manufacturer reserves the rights to change the above without any notice.