




RIDGERS

SHARE RIDGER



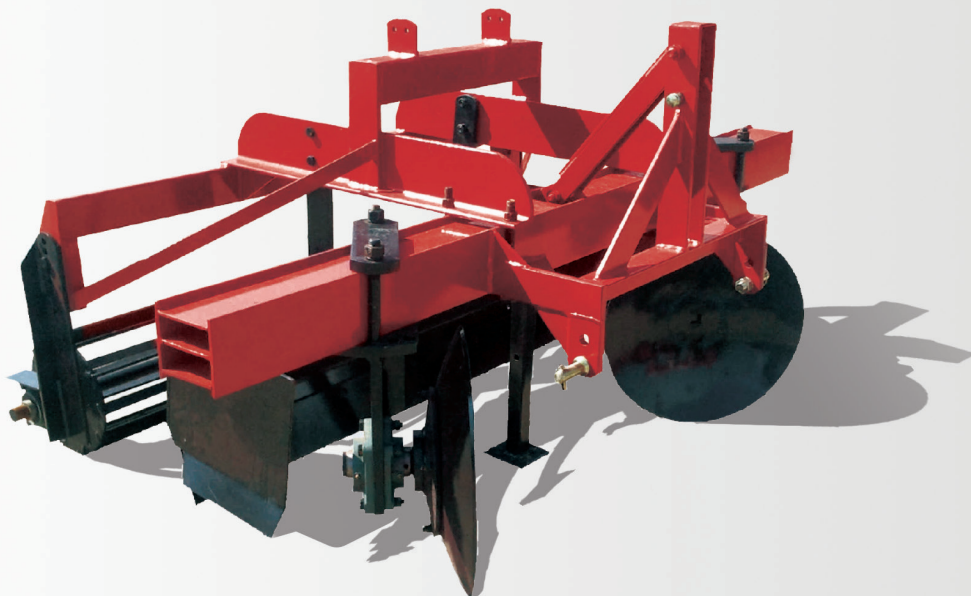

RIDGERS

SHARE RIDGER

TECHNICAL SPECIFICATIONS

The Share Ridger has the option of opening furrows or ridges as demanded. The width can also be adjusted according to the operator's requirements by changing the configuration of the mouldboard connection on the main frame enabling the machine to make water channels, open furrows and ridges between rows and ridging. Furthermore, de-weeding of existing ridges where the mouldboards meet in the centre is used as a furrow opener, and when changed from the centre to a configuration of a mouldboard right and left, the machine can be used as a Ridger. Fertilizer bins can also be fitted to fertilize while cleaning the furrows.

STOCK CODE	NUMBER OF MOULDBOARDS	NUMBER OF ROWS	FERTILIZER BIN	WORKING DEPTH	SPACE BETWEEN RIDGES	REQUIRED POWER
AOP 1	2	1	OPTIONAL	250mm	ADJUSTABLE	35-45kW
AOP 2	4	2	OPTIONAL	250mm	ADJUSTABLE	45-50kW
AOP 3	6	3	OPTIONAL	250mm	ADJUSTABLE	55-60kW

* Manufacturer reserves the rights to change the above without any notice.